

100 AMP MOBILE HOME SERVICE ENTRANCE REQUIREMENTS



POLE SPECIFICATIONS

1. 20 FOOT TREATED POLE, SIX INCHES IN DIAMETER.
2. POLE MUST BE SET TWO FEET OR CLOSER TO MOBILE HOME.
3. POLE MUST BE SET FOUR FEET DEEP IN GROUND.
4. MUST INSTALL CONCRETE AROUND TOP TWO FEET OF HOLE.
5. WEATHERHEAD AND EXPOSED SERVICE CONDUCTORS MUST BE LOCATED AT LEAST 3 FEET FROM DOOR OR WINDOW. THE METERBASE MUST BE LOCATED AT LEAST 3 FEET FROM HINGED SIDE OF DOOR.


CUSTOMER'S SERVICE ENTRANCE

TWO-#2 BLACK HOT LEGS
ONE-#4 WHITE NEUTRAL
ALL CONDUCTORS MUST BE COPPER
DRIP LOOP CONDUCTORS MUST BE 18 INCHES OUTSIDE WEATHERHEAD
ALL WIRES MUST BE OF THE CORRECT COLORS, NOT TAPED OR PAINTED

100 AMP METERBASE SHOULD BE MOUNTED 5 FT. TO 5-1/2 FT. ABOVE GROUND LEVEL TO CENTER OF METER BASE WITH A 100 AMP BREAKER BELOW.

IMPORTANT
IT IS THE CUSTOMER'S RESPONSIBILITY TO PROVIDE A SERVICE MAST OF ADEQUATE STRENGTH TO SAFELY WITHSTAND THE STRAIN IMPOSED BY THE UTILITY'S SERVICE DRDP.

ALL SERVICES SHALL MEET OR EXCEED THE NEC AND NESC CODES

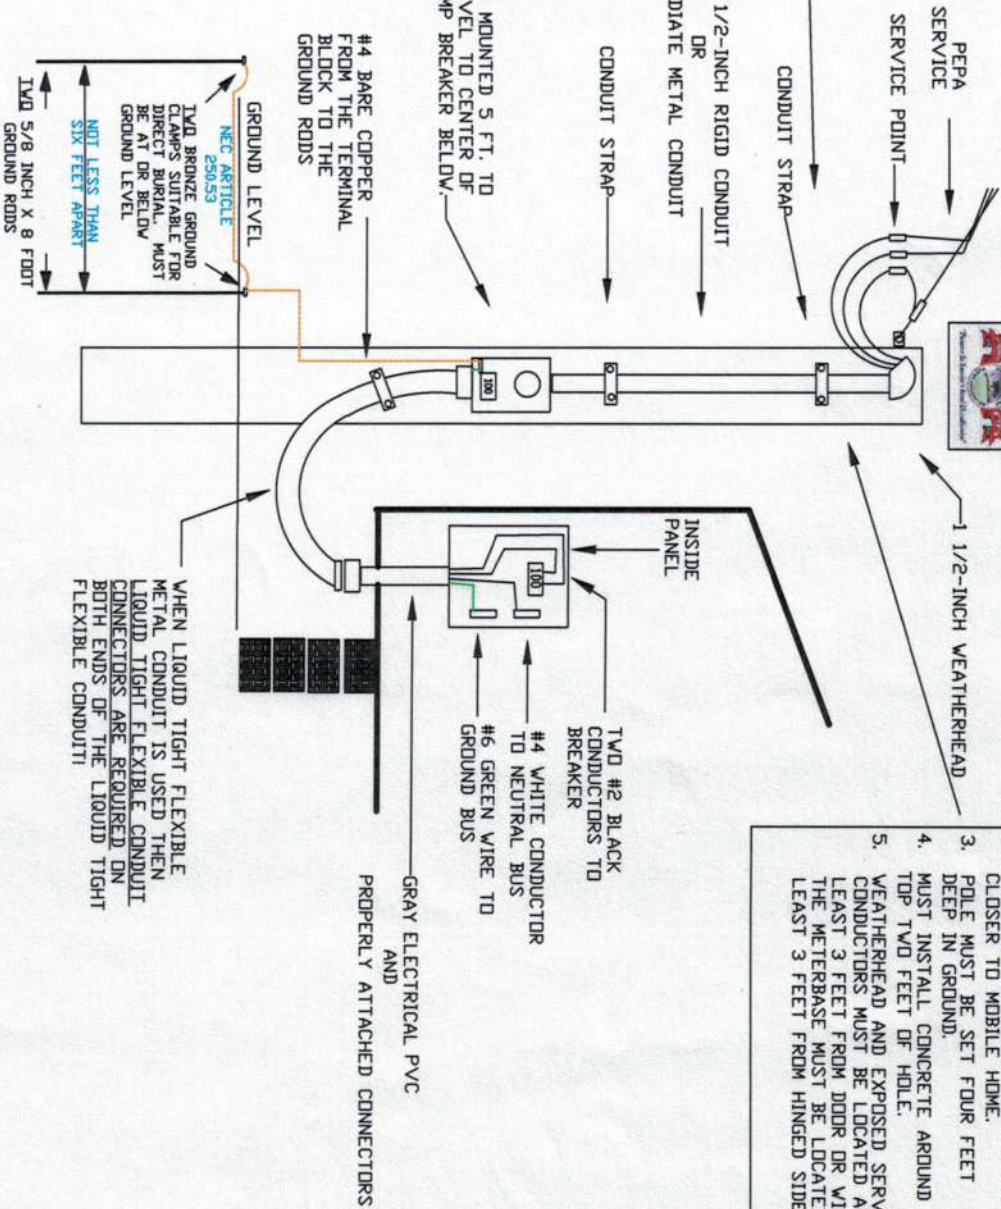

SEE BACK FOR OTHER INSTRUCTIONS

REVISED APRIL 2019

PONTIAC ELECTRIC POWER ASSOCIATION
662-489-3211 PONTIAC
662-983-2727 BRUCE
DRAWN BY R. MORGAN



"Pioneers In America's Rural Electrification"

Please note

In order to ensure the meter is set at the proper location, all dwellings, apartments, mobile homes, and buildings must be clearly marked with the correct E-911 address in a prominent location before a meter will be set.

Apartments which are designated by apartment number and mobile homes parks that are identified by lot number must also be clearly marked. The correct apartment number or mobile home lot number must be shown on the rental receipt.