

200 AMP GENERAL POWER SERVICE ENTRANCE REQUIREMENTS

GENERAL POWER REQUIREMENTS

1. A PERMANENT STRUCTURE EITHER ON CONCRETE BLOCKS OR ON CONCRETE SLAB.
2. STRUCTURE IS DEFINED AS A SHOP, BARN, STORAGE BUILDING, WELL HOUSE, GARAGE, CONCESSION STAND, OFFICE BUILDING OR COMMERCIAL BUILDING.
3. NO WHEELS OR AXLES THAT CAN MAKE THE STRUCTURE MOBILE.
4. GENERAL POWER STRUCTURES WILL REQUIRE SEPERATE MEMBERSHIP AND DEPOSIT.



ELECTRICAL SERVICE ENTRANCE SPECIFICATIONS

ALL CONDUCTORS MUST BE THE CORRECT SIZE AND MUST BE COPPER.

TWO-3/0 BLACK HOT LEGS

ONE-1/0 WHITE OR MARKED WHITE NEUTRAL


DRIP LOOP CONDUCTORS MUST BE 18 INCHES OR LONGER OUTSIDE OF WEATHERHEAD.

WEATHERHEAD AND EXPOSED SERVICE CONDUCTORS MUST BE LOCATED AT LEAST 3 FEET FROM DOOR OR WINDOW.

THE METERBASE MUST BE LOCATED AT LEAST 3 FEET FROM HINGED SIDE OF DOOR.

MUST MAINTAIN A MINIMUM OF 10 FOOT CLEARANCE FROM GROUND LEVEL TO DRIP LOOP IF THE WEATHERHEAD QUALIFIES TO BE MOUNTED BELOW EAVE OF ROOF.

IF THE RIGID CONDUIT RISER PIPE IS TO BE EXTENDED OR SPLICED, THE JOINT MUST BE LOCATED BELOW THE ROOF LINE AND AN ADDITIONAL CONDUIT STRAP MUST BE INSTALL ABOVE THE JOINT.

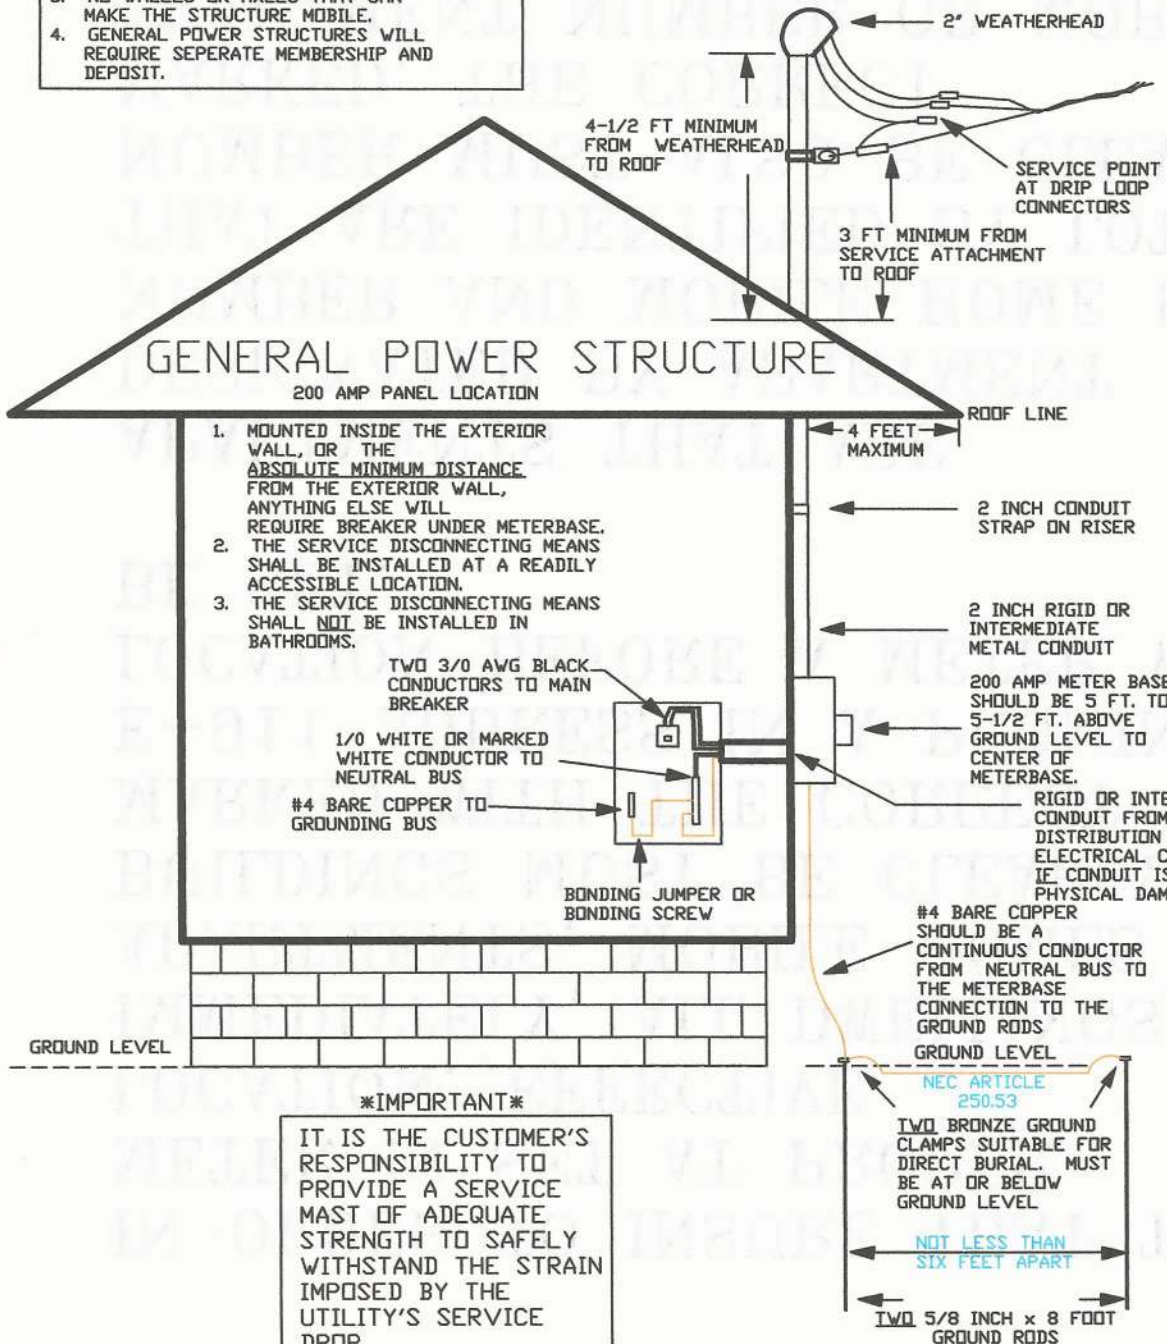

IMPORTANT

IT IS THE CUSTOMER'S RESPONSIBILITY TO PROVIDE A SERVICE MAST OF ADEQUATE STRENGTH TO SAFELY WITHSTAND THE STRAIN IMPOSED BY THE UTILITY'S SERVICE DROP.

ALL SERVICES SHALL MEET OR EXCEED THE NEC AND NESC CODES

SEE BACK FOR OTHER INSTRUCTIONS

REVISED DECEMBER 2016

PONTOTOC ELECTRIC POWER ASSOCIATION
662-489-3211 PONTOTOC
662-983-2727 BRUCE
DRAWN BY R. MORGAN

IN ORDER TO INSURE THAT THE METER IS SET AT PROPER LOCATION, EFFECTIVE IMMEDIATELY, ALL DWELLINGS, APARTMENTS, MOBILE HOMES AND BUILDINGS MUST BE CLEARLY MARKED WITH THE CORRECT E-911 ADDRESS IN A PROMINENT LOCATION BEFORE A METER WILL BE SET.

APARTMENTS THAT ARE DESIGNATED BY APARTMENT NUMBER AND MOBILE HOME PARKS THAT ARE IDENTIFIED BY LOT NUMBER MUST ALSO BE CLEARLY MARKED. THE CORRECT APARTMENT NUMBER OR MOBILE HOME LOT NUMBER MUST BE SHOWN ON THE RENTAL RECEIPT.